

Performance analysis of metamaterial antennas based on variations in combination and radius of hexagonal SRR

Defrianto^{1,*}, Vepy Asyana^{1,2,3}, Ari Sulisty Rini¹, Yan Soerbakti¹, Romi Fadli Syahputra⁴

¹Department of Physics, Universitas Riau, Pekanbaru 28293, Indonesia

²Department of Physics, Institut Teknologi Bandung, Bandung 40132, Indonesia

³Department of Physics, Kyushu University, Fukuoka 819-0395, Japan

⁴Department of Physics, Universitas Muhammadiyah Riau, Pekanbaru 28294, Indonesia

ABSTRACT

The low antenna performance is a concern for researchers to overcome in modern technology. As an effort to overcome this problem, the application of the metamaterial structure to the antenna was carried out to increase the antenna parameters. This study aims to analyze the effect of antenna performance due to the influence of variations in the combination and radius of the SRR hexagonal metamaterial. The research was conducted in a simulation, starting with designing the antenna structure with the metamaterial of two rings into a resonator with a radius variation of 2.5 mm and 2.7 mm, then combining one to four hexagonal SRRs. The results showed that the highest antenna performance was obtained from a combination of four hexagonal SRRs for a radius of 2.7 mm with parameter values in the form of return loss -38.95 dB, a bandwidth of 7.88 GHz at a working frequency of 1.12 – 9.00 GHz and a gain of 5.92 dBi.

ARTICLE INFO

Article history:

Received Sep 21, 2023

Revised Oct 3, 2023

Accepted Oct 25, 2023

Keywords:

Antenna

Metamaterial

Split Ring Resonator

This is an open access article under the [CC BY](#) license.



* Corresponding Author

E-mail address: defrianto@lecturer.unri.ac.id

1. INTRODUCTION

Microstrip antennas have several advantages compared to conventional microwave antennas. However, microstrip antennas present several disadvantages such as limited bandwidth, low gain, and reduced radiation power [1-4]. These parameters play an important role in determining whether the antenna performance is good or not. Several innovations have been made to overcome these problems, including implementing metamaterial structures into antenna objects [5, 6]. The application of metamaterials to improve antenna parameters in the last decade [7-10].

Metamaterials are artificial periodic structures consisting of structural elements with negative of permittivity and permeability that carry sub-wavelengths at certain resonant frequencies [11, 12]. Metamaterials can be applied in sensing antennas because they offer high miniaturization which makes them highly sensitive to environmental changes and also shows their suitability for sensing materials including solid dielectrics [13-15]. The type of metamaterial structure used is a split ring resonator (SRR). Various types of metamaterial structures have been developed, such as square, circular, rod, and other SRR structures [16]. The hexagonal SRR structure metamaterial will be used in this research because it is rarely found. In addition, the hexagonal structure has the potential for greater resonance [17-19]. This research aims to analyze the comparison of antenna performance from the influence of the metamaterial structure implemented by varying the amount of metamaterial and the SRR radius.

2. RESEARCH METHODS

Based on Figure 1, this research will begin with a literature study regarding the basic properties of metamaterials and studying the concept of microstrip antennas. Then identify and start designing a

hexagonal metamaterial structure in the form of an SRR and its application in microstrip antenna applications using CST Studio Suite software. The simulation identifies metamaterial properties by analyzing S-parameter data from the simulation results to obtain refractive index values through computation using Matlab software. After that, redesign the shape of the hexagonal structure whose metamaterial properties have been identified into an antenna application with a combination of the SRR-H structure, then start the simulation with the Start Simulation command in the CST menu. Data analysis and interpretation of simulation and experimental results were obtained in the form of antenna parameter values such as return loss, VSWR, gain, and directivity.

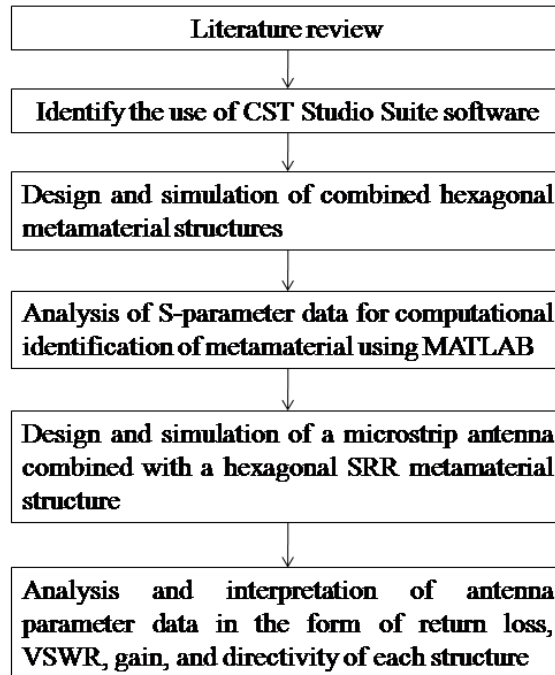


Figure 1. Research flow

3. RESULTS AND DISCUSSIONS

The metamaterial structure that has been implemented on the antenna object has a very significant influence. Antenna performance becomes more varied with the presence of metamaterial structures. Figure 2 (a) and (b) shows the antenna return loss with various combinations of one (A1), two (A2), three (A3), and four (A4). Apart from that, the SRR radius is also varied by 2.5 mm and 2.7 mm.

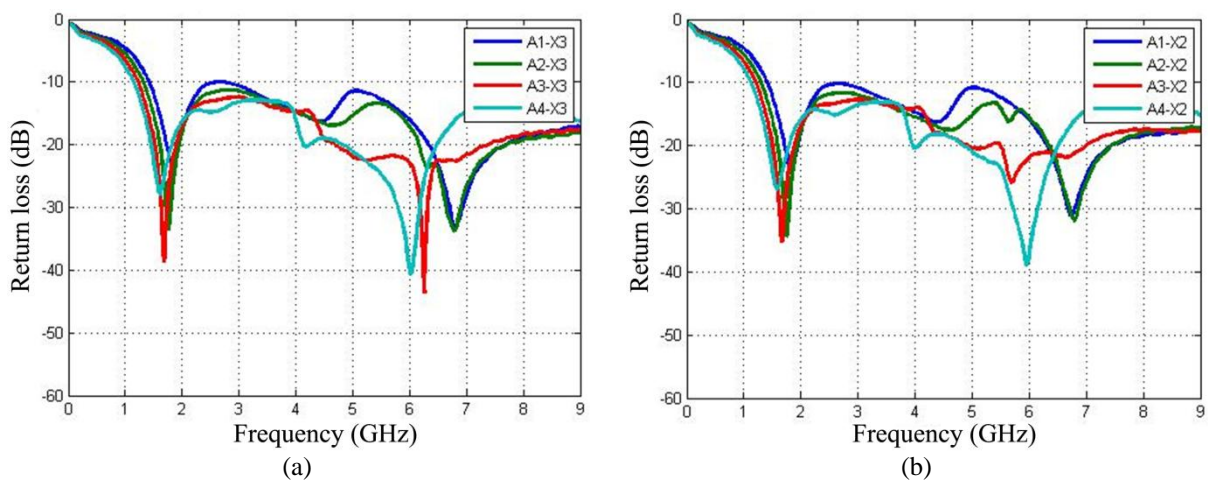


Figure 2. Return loss for various combinations of radii (a) 2.5 mm and (b) 2.7 mm

The significant change in return loss explains that the antenna is more sensitive in the presence of metamaterial [13]. By varying the combination of metamaterials, the resulting differences are visible as shown in Figure 2. In addition, by varying the SRR radius, the antenna return loss only experiences small changes in the resonance frequency. The highest antenna performance results from a combination of four hexagonal SRR metamaterials of radii 2.5 mm and 2.7 mm which are respectively -41.21 dB and -38.95 dB at a resonant frequency of 6 GHz. However, at a resonant frequency of 1.75 GHz, the highest return loss is produced by an antenna with a combination of three hexagonal SRR metamaterials.

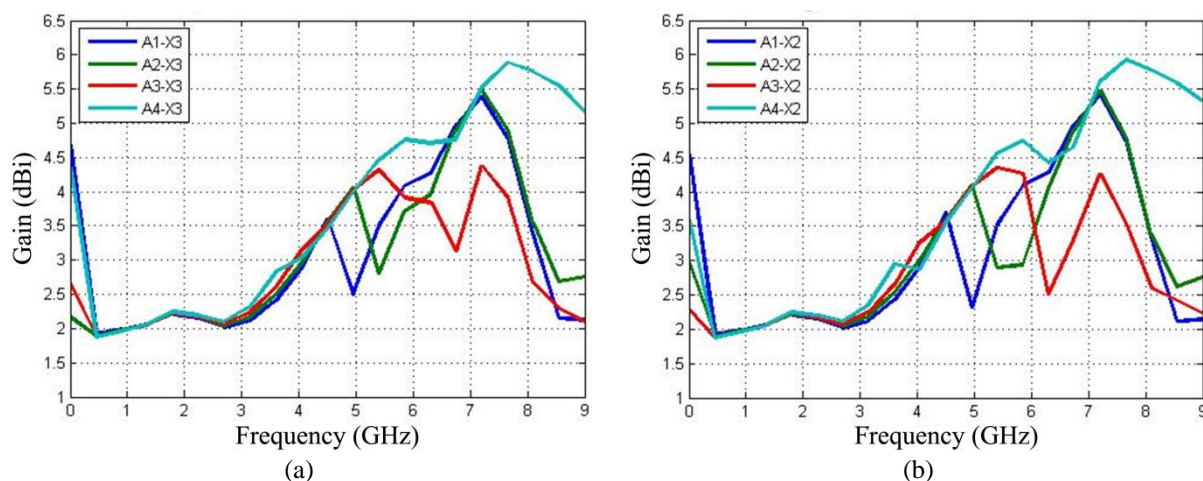


Figure 3. Antenna gain for various combinations of radii (a) 2.5 mm and (b) 2.7 mm

Another parameter of the antenna that can determine whether the antenna's performance is good or not is the gain. These parameters are generated based on the influence of bandwidth and return loss [20]. The implementation of metamaterials in the antenna provides clear differences in gain with variations in combination and SRR radius (see Figure 3). The highest gain resulted from a combination of four metamaterials of radii 2.5 mm and 2.7 mm, respectively 5.81 dBi and 5.92 dBi at a frequency of 7.67 GHz. Gain results from the largest bandwidth from 1.12-9.00 GHz and the highest return loss.

4. CONCLUSION

The combined metamaterial structure antenna of one to four hexagonal SRRs produces an increase in antenna parameters with an average increase of 30% in return loss and 10% in gain. The highest parameters are produced by a metamaterial antenna combining four hexagonal SRRs with a radius of 2.7 mm with a maximum return loss value of -38.95 dB, a bandwidth of 7.88 GHz in a working frequency of 1.12-9.00 GHz, and a gain of 5.92 dBi.

REFERENCES

- [1] A. S. Mohammed, *et al.*, "Microstrip patch antenna: A review and the current state of the art," *Journal of Advanced Research in Dynamical and Control Systems*, vol. 11, pp. 510-524, 2019.
- [2] Z. Zamri, *et al.*, "Determination of the most effective wifi signal intensity area in an enclosed room," *Science, Technology and Communication Journal*, vol. 2, pp. 63-66, Feb 2022.
- [3] D. Defrianto, *et al.*, "Acoustic wave propagation model in the surface layer area based on the Runge-Kutta method," *Science, Technology and Communication Journal*, vol. 3, pp. 39-46, Feb 2023.
- [4] Y. Soerbakti, *et al.*, "A review - Integrasi lapisan tipis ZnO pada aplikasi metamaterial sebagai wujud potensi sensor ultra-sensitif dan multi-deteksi," *Seminar Nasional Fisika Universitas Riau VII (SNFUR-7)*, vol. 7, Jun 2022
- [5] C. Miliyas, *et al.*, "Metamaterial-inspired antennas: A review of the state of the art and future design challenges," *IEEE Access*, vol. 9, pp. 89846-89865, Jun 2021.
- [6] S. RoyChoudhury, *et al.*, "Recent advances in metamaterial split-ring-resonator circuits as

- biosensors and therapeutic agents," *Biosensors and Bioelectronics*, vol. 86, pp. 595-608, Dec 2016.
- [7] G. Varamini, *et al.*, "Compact and miniaturized microstrip antenna based on fractal and metamaterial loads with reconfigurable qualification," *AEU-International Journal of Electronics and Communications*, vol. 83, pp. 213-221, Jan 2018.
- [8] W. J. Krzysztofik and T. N. Cao, "Metamaterials in application to improve antenna parameters," *Metamaterials and Metasurfaces*, vol. 12, pp. 63-85, Nov 2018.
- [9] Y. P. Rezki, *et al.*, "Design and testing of circular metamaterial-based salinity sensors," *Science, Technology and Communication Journal*, vol. 3, pp. 85-90, Jun 2023.
- [10] D. Defrianto, *et al.*, "Analisis kinerja antena berdasarkan pengaruh variasi kombinasi dan jari-jari metamaterial heksagonal struktur split ring resonator," *Seminar Nasional Fisika Universitas Riau V (SNFUR-5)*, vol. 5, Oct 2020.
- [11] S. Kundu and S. K. Jana, "Leaf-shaped CPW-fed UWB antenna with triple notch bands for ground penetrating radar applications," *Microwave and Optical Technology Letters*, vol. 60, pp. 930-936, Apr 2018.
- [12] M. D. H. Gamal, *et al.*, "Investigasi karakteristik anomali indeks bias negatif metamaterial array struktur split ring resonator," *Seminar Nasional Fisika Universitas Riau V (SNFUR-5)*, vol. 5, Oct 2020.
- [13] K. N. Paracha, *et al.*, "Wearable antennas: A review of materials, structures, and innovative features for autonomous communication and sensing," *IEEE Access*, vol. 7, pp. 56694-56712, Apr 2019.
- [14] H. Kairm, *et al.*, "Concept and model of a metamaterial-based passive wireless temperature sensor for harsh environment applications," *IEEE Sensors Journal*, vol. 15, pp. 1445-1452, Oct 2014.
- [15] W. Puspita, *et al.*, "Prediksi kadar particulate matter (PM10) menggunakan jaringan syaraf tiruan di Kota Pekanbaru," *Komunikasi Fisika Indonesia*, vol. 18, pp. 1-4, Mar 2021.
- [16] N. Engheta and R. W. Ziolkowski, "Metamaterials: physics and engineering explorations," *John Wiley & Sons*, Jun 2006.
- [17] T. Saktioto, *et al.*, "GHz frequency filtering source using hexagonal metamaterial splitting ring resonators," *Microwave and Optical Technology Letters*, vol. 59, pp. 1337-1340, Jun 2017.
- [18] S. Saktioto, *et al.*, "Improvement of low-profile microstrip antenna performance by hexagonal-shaped SRR structure with DNG metamaterial characteristic as UWB application," *Alexandria Engineering Journal*, pp. 61, pp. 4241-4252, Jun 2022.
- [19] Y. Soerbakti, *et al.*, "Investigasi kinerja antena berdasarkan dispersi anomali metamaterial struktur heksagonal split ring resonator," *Komunikasi Fisika Indonesia*, vol. 17, pp. 74-79, Jul 2020.
- [20] S. Saidah, *et al.*, "Optimasi Gain Antena Mikrostrip Berdasarkan Data Geometri Sel Metamaterial CSRR melalui Desain dan Simulasi," *Prosiding Seminar Teknik Elektro & Informaika, PNUP Makassar*, pp. 130-134, 2016.