

Analysis of Shallow Well Depth Prediction: A Study of Temporal Variation of GRACE Satellite Data in Tampan District-Pekanbaru, Indonesia

Meryati Pertiwi, Muhammad Juandi*, Rakhmawati Farma
Department of Physics, Universitas Riau, Indonesia

ABSTRACT

Urban geographic areas that are far from surface water resources cause the availability of groundwater to be limited. Groundwater is the main source of water for urban communities today, however, groundwater does not always exist. Groundwater search continues with the old method which takes a long time. In this study, a groundwater search using a satellite imaging method is proposed to create work effectiveness and a faster time. This study aims to analyze the underground water reservoir in Tampan Regency using Gravity Recovery and Climate Experiment (GRACE) satellite data in the form of variations in Total Water Storage (TWS) and correlated with In-situ data. The method used is in the form of TWS variation modeling in the form of Multiple Linear Regression equations. Parameters that influence the modeling of TWS variations are rainfall, evaporation, and runoff. The classical assumption test and model feasibility test are used to determine the parameter accuracy in data estimation. The results showed that the multiple linear regression model passed the assumption test and the model feasibility test. The value of the runoff coefficient is greater than the value of the precipitation coefficient. This is because Tampan District has sandy clay rock types and decreasing green open land, so the potential for groundwater loss in the Tampan Regency area is 1,180,326.63 m³ per month.

ARTICLE INFO

Article history:

Received Sep 16, 2020

Revised Oct 17, 2020

Accepted Oct 15, 2020

Keywords:

Groundwater
GRACE satellite
Tampan District

This is an open access article under the [CC BY](#) license.



* Corresponding Author

E-mail address: juandi@lecturer.unri.ac.id

1. INTRODUCTION

Underground water is a problem in various big cities, including Pekanbaru City, which has the most densely populated sub-district, Tampan District, arithmetic with a population density of 5,148 people/km² in 2018. This figure has increased by 6.96% from the previous year [1]. The population growth rate of Tampan District has caused the need for water resources to increase so that there has been a significant change in the amount of groundwater and surface water [2]. This is exacerbated by the lack of rainfall and water extraction that seeps into the soil, local lithological, and geological conditions that cause rainfall to flow as runoff and continue to the sea [3].

Analysis of changes in underground water storage needs to be carried out to anticipate the crisis of water availability in Pekanbaru City, particularly in Tampan District, where most of the people depend on underground water from shallow wells to meet their daily needs [4]. Apart from being a result of human consumption, changes in water storage are also influenced by the hydrological cycle [5]. Disruptions that occur in the hydrological cycle cause drought in the dry season [6] and cause flooding in the rainy season [7]. The effect of rainfall (precipitation) [8], evaporation [9], and runoff [10] in the hydrological cycle result in changes in underground water storage which result in a decrease in the depth of shallow wells owned by residents [11]. Therefore,

we need an equation model that can be used to describe the effect of the hydrological cycle on the decrease or increase in underground water storage and its effect on changes in shallow well depth.

Research on groundwater storage analysis using variations in the distribution of Total Water Storage (TWS) has been widely carried out, among others by Rodell and Famiglietti (2002) who analyzed changes in groundwater storage in areas of the Mississippi River that have high aquifer patterns through surface modeling soil and humidity changes from the GRACE satellite gravity signal [12]. The same approach was taken by Frappart (2018) for the analysis of groundwater depletion globally [13] and by Hao (2019) in the Songhua River Basin region [14]. Xiao (2015) and Yin (2017) use the Global Land Data Assimilation System (GLDAS) data [15,16] or use hydrometeorological data [17].

2. MATERIALS AND METHODS

2.1. Tools and Materials

Table 1. Research tools and materials.

Tools and Materials	Information
Global Positioning System (GPS)	To determine the coordinates of the age of the population.
Meter	To measure the depth of citizens.
The area of Pekanbaru City	Topographic maps of the research area.
Laptop device	To store, process and analyze thesis data.
SPSS application	For data analysis and determination of multiple linear regression equations.
Surfer application	For analysis of the contour data and groundwater distribution.

2.2. Time and Place of Research

The research was carried out from July 2020 to August 2020. The study consisted of two stages, namely: field survey activities in Tampan District with nine villages, as follows: Air Putih Village, Bina Widya Village, Delima Village, Sialang Munggu Village, West Sidomulyo Village, Simpang Baru Village, Tobek Godang Village, Tuah Karya Village, and Tuah Madani Village. The survey data were then further analyzed at the Earth Physics Laboratory, Riau University.

2.3. Research Scheme

The research scheme starts from the stages of observation and data collection techniques, data collection (In-situ measurement, Pekanbaru BMKG data and TWS data from the Gravity Recovery and Climate Experiment (GRACE) satellite), lithology analysis of the research area, SPSS data management, Classical Assumption testing, Model Feasibility Test, Variation data analysis Temporal from the GRACE Satellite, analysis of shallow well depth predictions, determination of contour maps with the Surfer application, modeling of groundwater flow patterns based on profiles.

3. RESULTS AND DISCUSSION

3.1. Temporal Variation of Underground Water Deposits in Tampan District

Equivalent Water Height (EWH) data presented by the GRACE Satellite shows dynamic changes over a period of 141 months of data collection. The graph in Figure 1. shows the correlation between the EWH data and precipitation, evaporation, and runoff.

Changes in groundwater distribution TWS affect changes in shallow well water levels. Figure 2. shows a significant decline starting from 2009 to the end of 2016. The level of the groundwater level tends to decrease over time, this is due to land conversion that occurred in the study area. Tampan Subdistrict, which initially had a large area of green open land, began to develop along with economic and social developments.

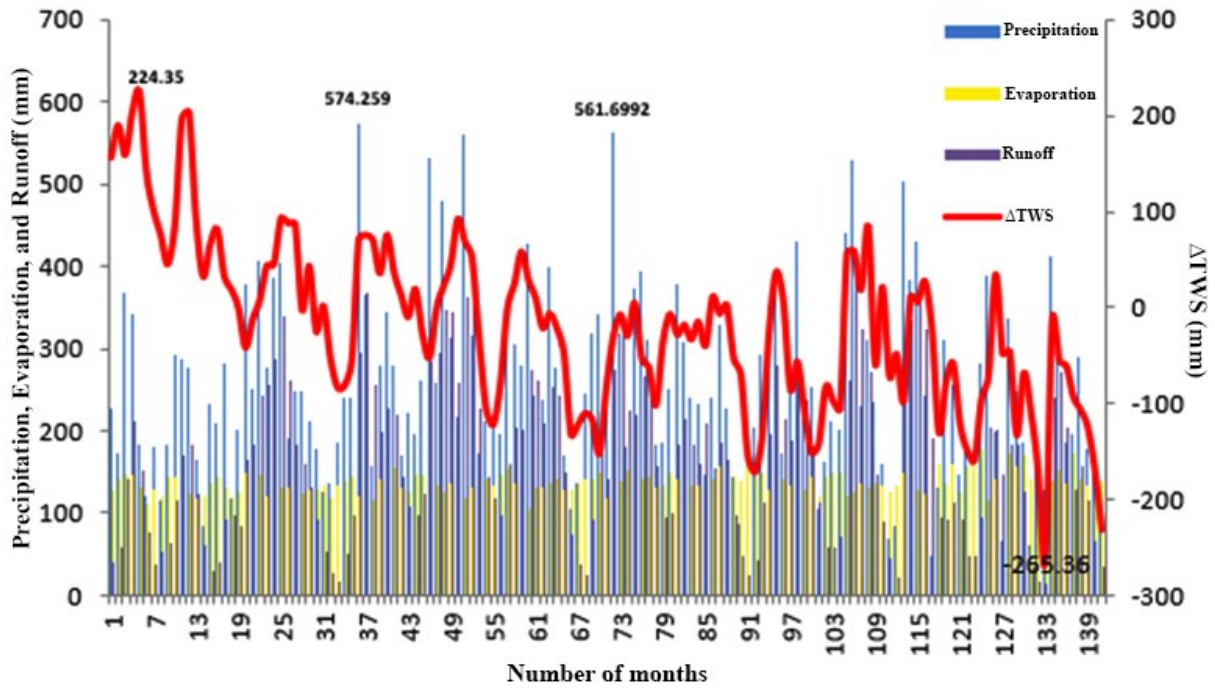


Figure 1. TWS, precipitation, evaporation, and runoff relationships.

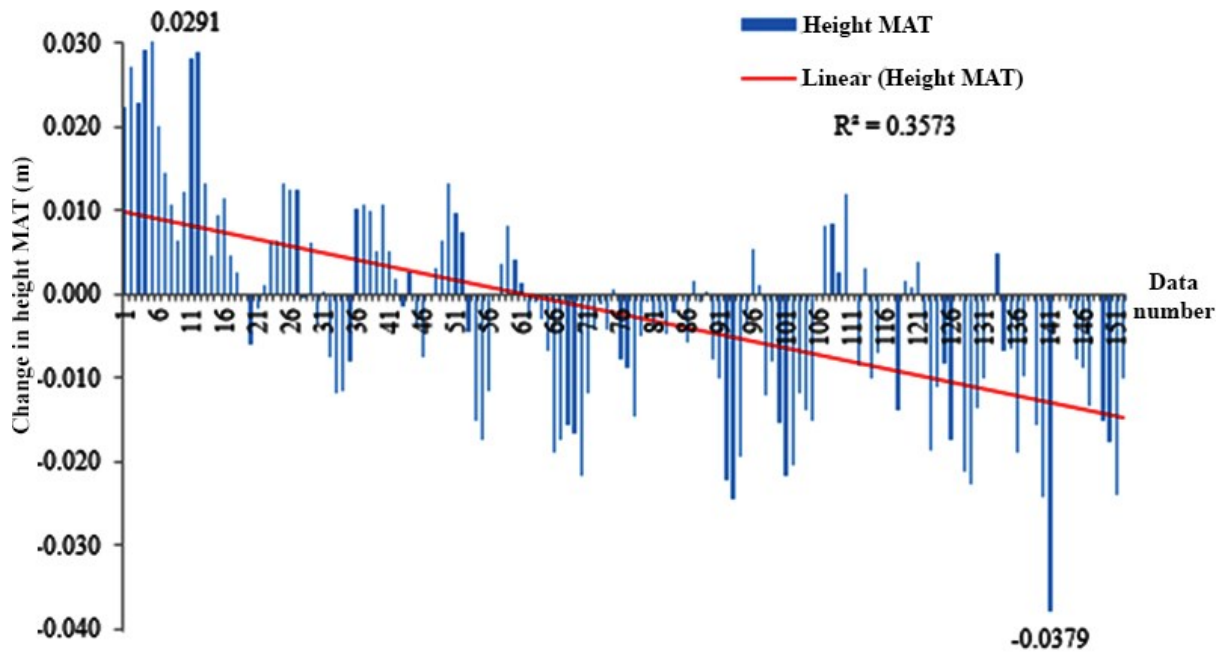


Figure 2. Change of groundwater level.

3.2. Groundwater Distribution Equation Model

The results of the multicollinearity test are shown in Table 2. The tolerance figure is close to 1 and the VIF value is less than 10, based on the classical linear OLS assumption requirements that the regression model is free from multicollinearity. Data analysis using the SPSS application provides the following multicollinearity test results. The best value is generated by the 2004-2010 data period with an average tolerance value of 0.667 and an average VIF value of 1.619.

Table 2. Results of multicollinearity test on different data periods.

Data	Model	Collinearity Diagnostics		Regression Model Assumptions
		Tolerance	VIF	
2004 - 2016	Precipitation	0.521	1.918	the regression model is free of multicollinearity
	Evaporation	0.923	1.084	
	Runoff	0.493	2.028	
2004 - 2010	Precipitation	0.524	1.908	the regression model is free of multicollinearity
	Evaporation	0.951	1.052	
	Runoff	0.527	1.899	
2011 - 2016	Precipitation	0.501	1.996	the regression model is free of multicollinearity
	Evaporation	0.815	1.227	
	Runoff	0.433	2.311	

3.3. Model Reliability Test (F Test)

The results of the model reliability test show that the calculated F test value is not too high. The greatest probability value is owned by the 2004-2010 data, which is 0.241 which means that the linear regression model does not have a significant effect and is not suitable to be used as a prediction model.

Table 3. Model reliability test results (Test F).

Data	F	Sig.	Information
2004 - 2016	12.647	.000b	the regression model has a significant F test
2004 - 2010	1.428	.241b	the regression model has a not significant F test
2011 - 2016	19.066	.000b	the regression model has a significant F test

3.4. Regression Coefficient Test (T Test)

Table 4. Regression coefficient test results (T test).

Data	Model	T	Sig.	Information
2004 - 2016	Precipitation	0.541	0.589	Regression coefficient has no significant effect
	Evaporation	-4.035	0	The regression coefficient has a significant effect
	Run off	2.195	0.03	The regression coefficient has a significant effect
2004 - 2010	Precipitation	-0.187	0.852	Regression coefficient has no significant effect
	Evaporation	-1.572	0.12	Regression coefficient has no significant effect
	Run off	0.934	0.353	Regression coefficient has no significant effect
2011 - 2016	Precipitation	-0.739	0.463	Regression coefficient has no significant effect
	Evaporation	-1.167	0.248	Regression coefficient has no significant effect
	Run off	5.014	0	The regression coefficient has a significant effect

The T test results of several data groups showed unsatisfactory results. The results are shown in Table 4, that the 2004-2016 data had the most significant regression coefficients because it had two variable coefficients with a small probability value of 0.05.

The evaporation and runoff variables have a probability value t count smaller than 0.05 and have a significant effect on the TWS variable or in other words, that the evaporation and precipitation values affect changes in groundwater level with a confidence level of 95%. Meanwhile, precipitation is too significant to influence it.

3.5. Determinant Coefficient Test (R)

This is used as a complementary condition in seeing the effect of the independent variable on the dependent variable. This test analysis can be used on two data groups that have a significant F test, namely the 2004-2016 data group and the 2011-2016 data group.

Table 5. Test results coefficient of determination (R).

Data	Adjusted R square	Information
2004 - 2016	0.2	The independent variable has an influence proportion of 20%
2004 - 2010	0.015	The independent variable has an influence proportion of 1.5%
2011 - 2016	0.492	The independent variable has an influence proportion of 49.2%

Table 6. SPSS data test results.

Data	Classic assumption test			Model Feasibility Test		
	Multicollinearity	Heteroscedasticity	Normality	F test	T test	R test
2004 - 2016	√	√	√	√	√	√
2004 - 2010	√	√	√			√
2011 - 2016	√	√	√	√		√

Table 5 shows that in 2004-2016 the value of precipitation, evaporation, and runoff had the greatest proportion of influence 49.2% while the remaining 50.8% was influenced by other variables, not in the regression model. The data for 2004-2016 has a lower proportion of influence, namely 20 percent, and the rest is influenced by other variables, not in the regression. The linear regression prediction model is obtained from predictive analysis or simplification of the symptoms found in nature based on the independent variables and the range of data used [18].

Tests conducted on the TWS sample data and precipitation, evaporation, and runoff data contained in Table 6, indicate that the best data period used to predict shallow well depth is data with a longer year period, 2004-2016.

The data period 2004-2016 is the best data period to use in making a prediction model for shallow well depth. Although the multicollinearity test data for the years 2004-2010 had good results, the model reliability test (F test) and regression coefficient test (T test) did not pass the feasibility test. The data for 2011-2016 have the best results on the heteroscedasticity, normality, and model reliability tests, but the regression coefficient test for these data does not pass the feasibility test.

The multiple linear regression equation models obtained from data analysis for 13 years of the GRACE satellite recording results is estimated in the following equation:

$$TWS_{2004-2006} = 215.9 + 0.046P + 2.055E + 0.221R \quad (1)$$

Shows the value of the runoff coefficient is greater than the value of the precipitation coefficient. Theoretically, precipitation has a greater effect as a source of groundwater infiltration but based on this study, the runoff factor has a greater effect on changes in groundwater storage [19]. This happens because Tampan District has a large land cover in the form of asphalt/concrete roads, housing, offices, and economic areas which make it difficult for water to enter the ground so that when it rains, the water does not directly enter the ground but flows in the form of runoff sewers to river basins DAS.

Figure 3 shows the prediction of changes in groundwater storage in Tampan District from February 2020 to January 2021. The highest decrease occurred in March 2020 due to the impact of the drought that occurred at the end of 2019. The peak of the dry season in 2020 occurred from July 2020 to August 2020 [20], causing a decrease in the TWS value to -71.82 mm. BMKG predicts that the peak of the rainy season will occur in November 2020. This has a correlation with the prediction results of the TWS value which shows that there will be an increase in groundwater storage up to 16.61 mm in the following month.

A significant increase in groundwater occurred in November 2020, due to the La Nina phenomenon which occurred in November. The time difference that occurs between the precipitation data and the runoff with changes in groundwater level has a lag of about 1 month, this is due to the geological effect of rock types in Tampan District, clay sandy [21]. Sandstone clay has porosity with infiltration time so that when it rains more water flows on the surface.

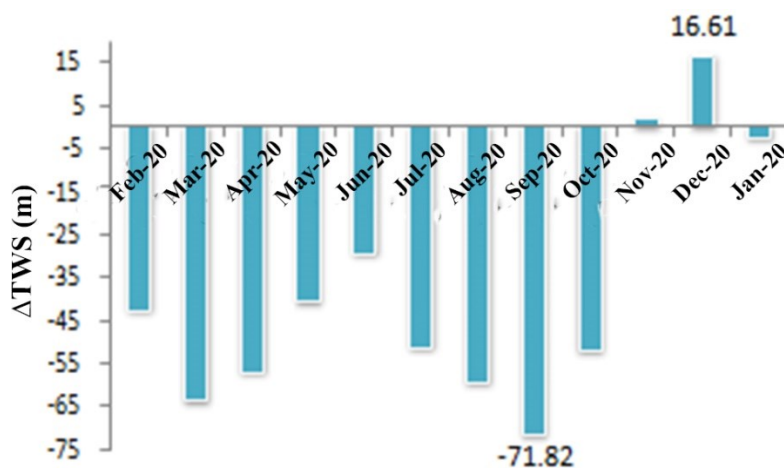


Figure 3. Prediction results of TWS from 2004-2016 data period.

3.6. Prediction of Shallow Well Depth in Tampan District

Prediction of shallow well depth in Tampan District. The h value is shallow well depth data obtained from in situ data measurements in the study area as an initial reference and produces data as in Table 7.

Table 7. Results of shallow well depth prediction in Tampan District.

Year	Month	Average shallow well depth (m)
2020	August	7.48381481
2020	September	6.76551817
2020	October	6.24183286
2020	November	6.25898703
2020	December	6.42507860
2021	January	6.40049122
2021	February	6.361989994
2021	March	6.309574914
2021	April	6.375903842

The results of the shallow well depth prediction in Table 7. show that shallow wells have the greatest average depth in August 2020 of 7.48 m, while the shallowest conditions occur in October 2020 of 6.24 m.

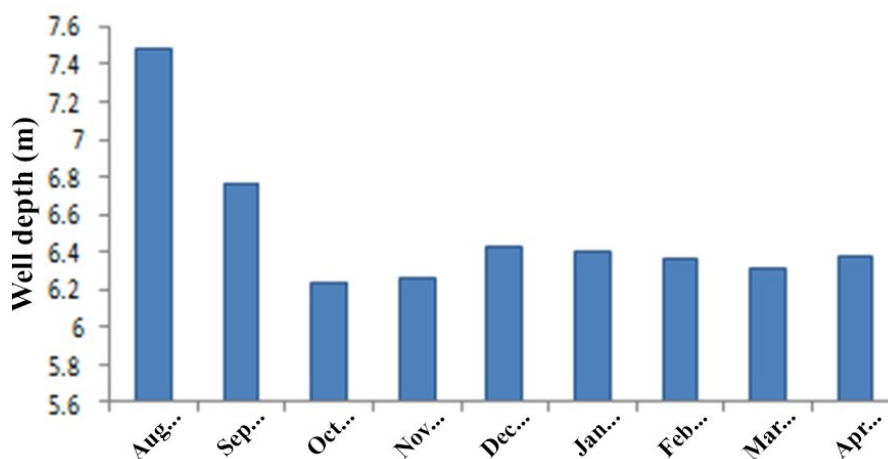


Figure 4. Graph of change in shallow groundwater depth.

Analysis of Shallow Well Depth ... (Pertiwi et al.)

The results of the prediction of variations in groundwater storage using multiple linear regression models provide an overview of the potential for groundwater loss in the Tampan District area of 1,180,326.63 m³ per month. Therefore, the government needs to create a conservation program for the Sustainable Use of Groundwater so that the quantity and quality of groundwater are maintained.

3.7. Contour Map

The 2D groundwater depth contour map is presented in Figure 5. where the highest position is located in the northern area of the Tampan sub-district. The area that has the highest groundwater level is located on Jl. Asparagus 1 and the area with the lowest groundwater level is located on Jl. Jasmine III Gg. Spruce 2.

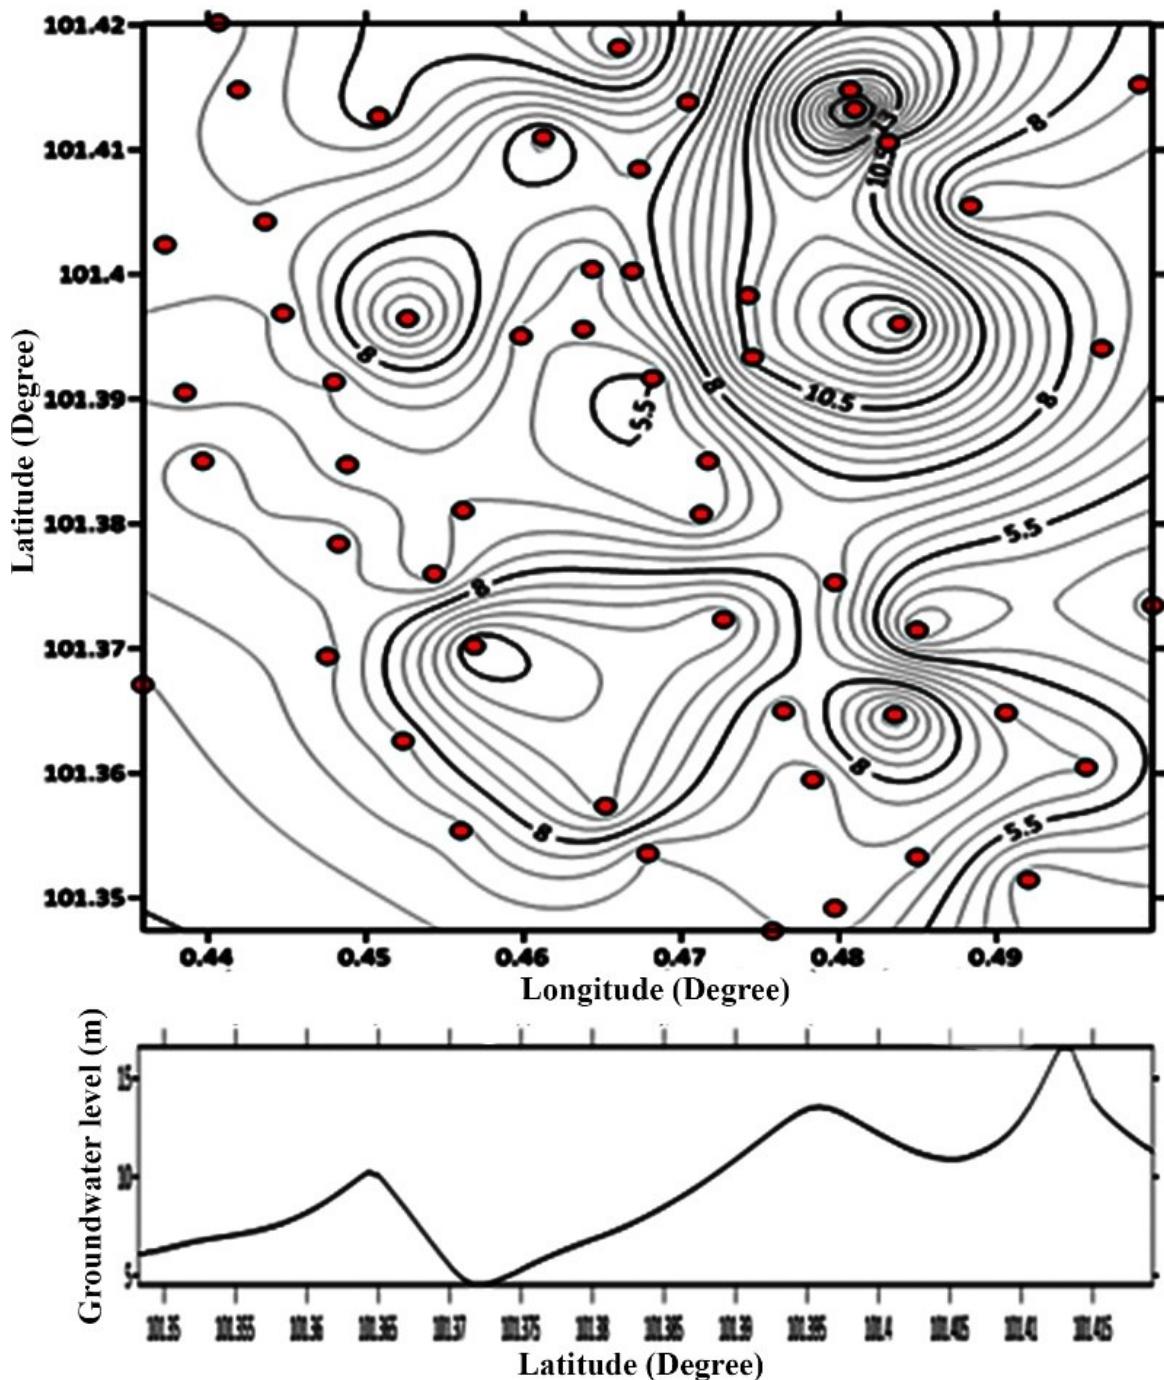


Figure 5. Contour plot latitude groundwater level and saplings in the Tampan sub-district. Sintechcom, 1(1), 16-26

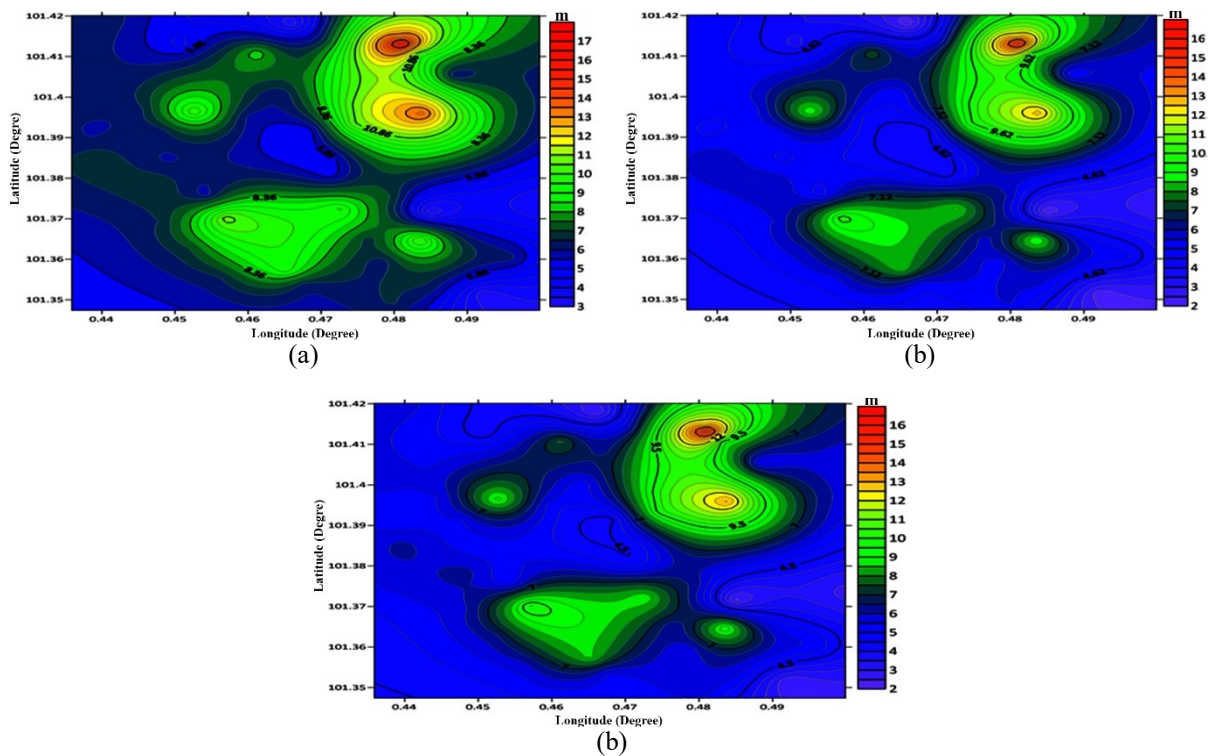


Figure 6. Map of the groundwater front of the month: (a) August; (b) October; and (c) December 2020.

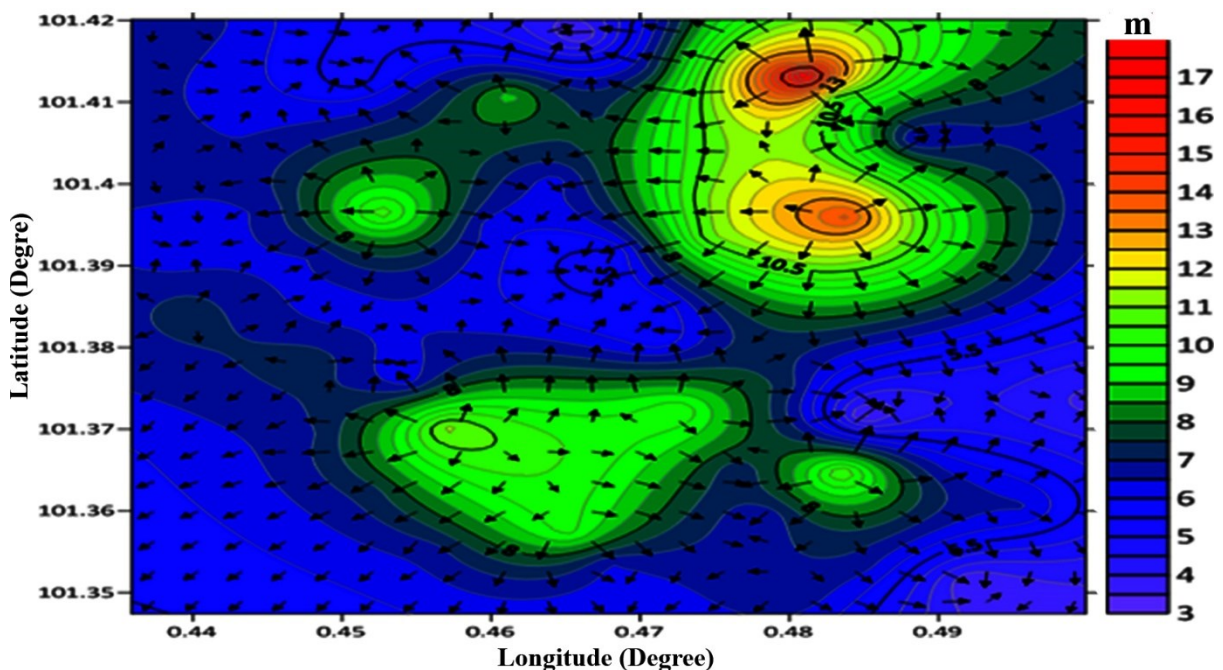


Figure 7. Groundwater Flow Pattern in the Tampan District area in the August 2020 2D model.

Sections of the cut across the contour map perpendicular to the north to the south show the groundwater level from the range of 3.36 m to 18.26 m. The depth of the groundwater level is highest in the north and the lower to the west.

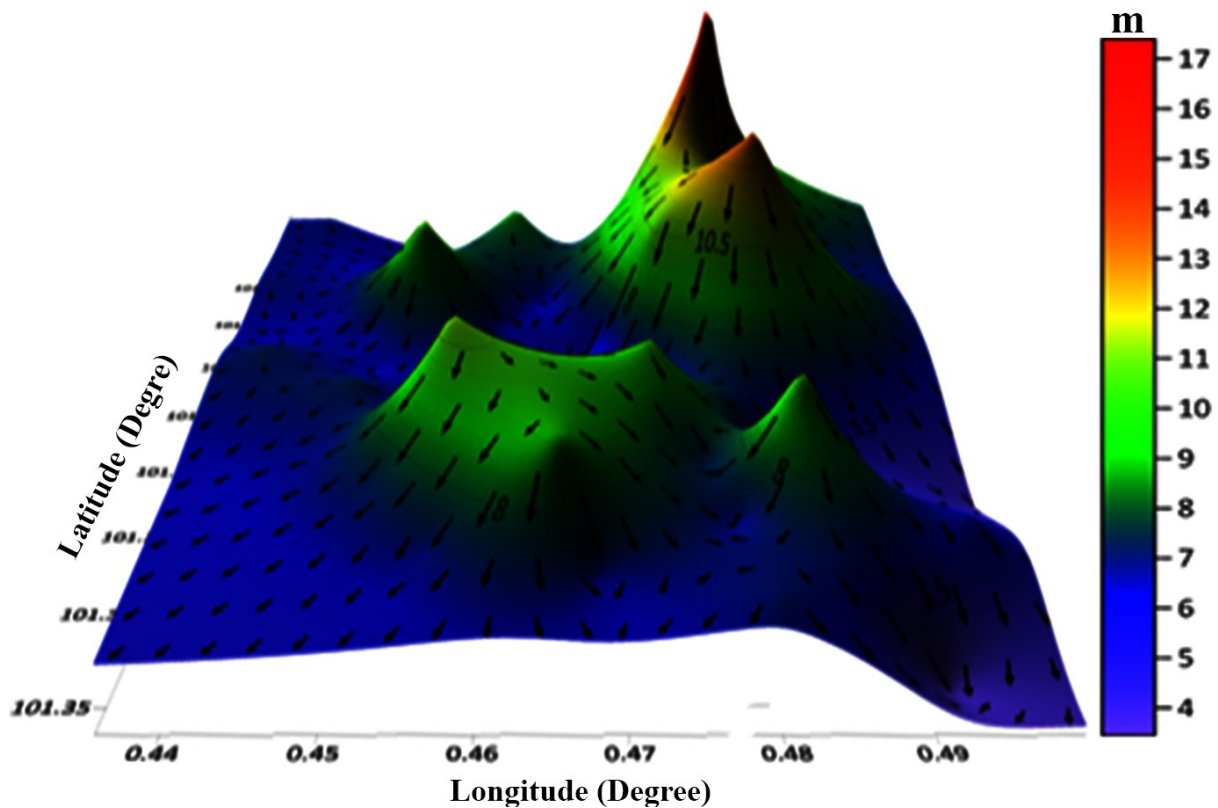


Figure 8. Groundwater Flow Pattern in the Tampan Subdistrict in August 2020 3D model.

4. CONCLUSION

Data on the temporal variation of groundwater distribution TWS has a significant decline starting from 2009 to the end of 2016 due to land conversion in the study area. The most appropriate data period used to create linear regression models is the time period from 2004-2016 because passed all the classical assumption tests and model feasibility tests. Groundwater distribution models and their relationship with the precipitation, evaporation and runoff variables produce multiple linear regression equations (1). Prediction analysis of shallow well depth shows that the highest increase occurred in October 2020 to December 2020 due to the La Nina phenomenon which will reach its peak in November 2020. The highest shallow well depth occurred in August 2020 at 7.48 m and the shallowest in October 2020 was 6.24 m and rose again in December 2020 amounting to 6.42 m.

REFERENCES

- [1] Central Bureau of Statistics. (2019). Laju Pertumbuhan PDB/PDRB. Accessed on September 2020, URL: <https://sirusa.bps.go.id/index.php?r=indikator/view&id=3>.
- [2] Juandi, M., & Sarkowi, M. (2016). 2D Groundwater Depth for Analysis of The Zone Unconfined Aquifer. *INSIST*, **1**(1), 16–19.
- [3] Juandi, M. & Syahril, S. (2017). Empirical relationship between soil permeability and resistivity, and its application for determining the groundwater gross recharge in Marpoyan Damai, Pekanbaru, Indonesia. *Water Practice and Technology*, **12**(3), 660–666.
- [4] Muhammad, J. & Islami, N. (2020, October). Assessment of Groundwater Quality Based on Geoelectric and Hydrogeochemical Parameters Around Slaughterhouses of Pekanbaru City, Indonesia. *Journal of Physics: Conference Series*, **1655**(1), 1–8.
- [5] Husen, E., Salma, S., & Agus, F. (2014). Peat emission control by groundwater management and soil amendments: evidence from laboratory experiments. *Mitigation and Adaptation Strategies for Global Change*, **19**(6), 821–829.

- [6] Payus, C., Huey, L. A., Adnan, F., Rimba, A. B., Mohan, G., Chapagain, S. K., ... & Fukushi, K. (2020). Impact of Extreme Drought Climate on Water Security in North Borneo: Case Study of Sabah. *Water*, **12**(4), 1–19.
- [7] Pokhrel, Y., Shin, S., Lin, Z., Yamazaki, D., & Qi, J. (2018). potential disruption of flood dynamics in the Lower Mekong River basin due to upstream flow regulation. *Scientific reports*, **8**(1), 1–13.
- [8] Yang, Q., Mu, H., Guo, J., Bao, X., & Martín, J. D. (2019). Temperature and rainfall amount effects on hydrogen and oxygen stable isotope in precipitation. *Quaternary International*, **519**, 25–31.
- [9] Balugani, E., Lubczynski, M. W., Reyes-Acosta, L., Van Der Tol, C., Francés, A. P., & Metselaar, K. (2017). Groundwater and unsaturated zone evaporation and transpiration in a semi-arid open woodland. *Journal of hydrology*, **547**, 54–66.
- [10] De Fleurian, B., Morlighem, M., Seroussi, H., Rignot, E., van den Broeke, M. R., Kuipers Munneke, P., Mouginot, J., Smeets, P. C., & Tedstone, A. J. (2016). A modeling study of the effect of runoff variability on the effective pressure beneath Russell Glacier, West Greenland. *Journal of Geophysical Research: Earth Surface*, **121**(10), 1834–1848.
- [11] Sivarajan, N. A., Mishra, A. K., Rafiq, M., Nagraju, V., & Chandra, S. (2019). Examining climate change impact on the variability of ground water level: A case study of Ahmednagar district, India. *Journal of Earth System Science*, **128**(5), 1–7.
- [12] Rodell, M. & Famiglietti, J. S. (2002). The potential for satellite-based monitoring of groundwater storage changes using GRACE: the High Plains aquifer, Central US. *Journal of Hydrology*, **263**(1-4), 245–256.
- [13] Frappart, F. & Ramillien, G. (2018). Monitoring groundwater storage changes using the Gravity Recovery and Climate Experiment (GRACE) satellite mission: A review. *Remote Sensing*, **10**(6), 1–25.
- [14] Chen, H., Zhang, W., Nie, N., & Guo, Y. (2019). Long-term groundwater storage variations estimated in the Songhua River Basin by using GRACE products, land surface models, and in-situ observations. *Science of The Total Environment*, **649**, 372–387.
- [15] Xiao, R., He, X., Zhang, Y., Ferreira, V. G., & Chang, L. (2015). Monitoring groundwater variations from satellite gravimetry and hydrological models: A comparison with in-situ measurements in the mid-atlantic region of the United States. *Remote Sensing*, **7**(1), 686–703.
- [16] Yin, W., Hu, L., & Jiao, J. J. (2017). Evaluation of groundwater storage variations in northern China using GRACE data. *Geofluids*, **2017**, 1–13.
- [17] Munier, S., Becker, M., Maisongrande, P., & Cazenave, A. (2012). Using Grace To Detect Groundwater Storage Variations: the Cases of Canning Basin and Guarani Aquifer System. *International Water Technology Journal*, **2**, 2–13.
- [18] Adujo, A. A., Adebowole, A. E., & Okezie, U. (2020). Modeling groundwater total dissolved solid from derived electromagnetic data using multiple linear regression analysis: a case study of groundwater contamination. *Modeling Earth Systems and Environment*, **6**(3), 1863–1875.
- [19] Zhang, J., Wang, W., Wang, X., Yin, L., Zhu, L., Sun, F., Dong, J., Xie, Y., Robinson, N. I., & Love, A. J. (2019). Seasonal variation in the precipitation recharge coefficient for the Ordos Plateau, Northwest China. *Hydrogeology Journal*, **27**(2), 801–813.
- [20] BMKG. (2020). *Prakiraan musim*. Accessed on 18 September 2020, URL: <https://www.bmkg.go.id/iklim/prakiraan-musim.bmkg>.
- [21] Antonius, S., Juandi, M., & Syech, R. (2018). Management and Conservation Considerations in Underground Water Potential in the Tampan District Pekanbaru. *Applied Science and Technology*, **2**(1), 268–276.