

# FTIR characterization analysis of BaTiO<sub>3</sub> nanoparticles synthesized using *Terminalia catappa* leaf extract

Yanuar Hamzah, Rahmi Dewi, Ade Darmawan, Intan Syahputri, Meinikmawati Laia, Miftahul Jannah\*, Ruth Cahaya Marta Uli Silaban, Silvia Mayang Sari, Sintia Selfiana Sinaga, Wandra Zuyandri

Department of Physics, Universitas Riau, Pekanbaru 28293, Indonesia

## ABSTRACT

Ferroelectric materials are materials that are in great demand in high-density memory applications, such as ferroelectric random access memory, ferroelectric field effect transistors, negative capacitance field effect transistors, and ferroelectric tunnel junctions. Barium titanate (BaTiO<sub>3</sub>) is a lead-free ferroelectric material with a high dielectric constant and low dielectric loss. The method used is sol gel for the synthesis of BaTiO<sub>3</sub> solution, extract for ketapang (*Terminalia catappa*) leaves, and characterized by FTIR. The FTIR spectrum synthesized with ketapang leaf extract displays several characteristic peaks in the mid-infrared region (4000 – 400 cm<sup>-1</sup>). These peaks can be determined by the specific vibration mode of the structure and organic compounds contained in the ketapang leaf extract. BaTiO<sub>3</sub> has a cubic perovskite structure with a peak wave number of 600 cm<sup>-1</sup>. Ketapang leaf extract is incorporated into the BaTiO<sub>3</sub> structure. BaTiO<sub>3</sub> has a Ti–O functional group. Ketapang leaf extract has C–O, C=O, C–H, and O–H functional groups.

## ARTICLE INFO

### Article history:

Received Mar 7, 2024

Revised May 14, 2024

Accepted Jun 23, 2024

### Keywords:

BaTiO<sub>3</sub>

Ferroelectric

FTIR

Nanoparticles

*Terminalia catappa*

This is an open access article under the [CC BY](#) license.



### \* Corresponding Author

E-mail address: miftahul.jannah3910@student.unri.ac.id

## 1. INTRODUCTION

Ferroelectric films have great potential for application in the fields of information storage, sensing, biomedicine, piezoelectric actuators, and so on because they have excellent ferroelectric, piezoelectric, and photoelectric properties [1, 2]. Ferroelectric materials are materials that are in great demand in memory and high-density applications, such as ferroelectric random access memory, ferroelectric field effect transistors, negative capacitance field effect transistors, and ferroelectric tunnel junctions [3-5]. Ferroelectric materials are piezoelectric, so they can function to convert electrical energy into mechanical energy [6, 7].

Barium titanate (BaTiO<sub>3</sub>) is a lead-free ferroelectric material with a high dielectric constant and low dielectric loss [8, 9]. BaTiO<sub>3</sub> is in great demand because it is considered one of the lead-free ferroelectrics with a perovskite structure (ABO<sub>3</sub>), has been used as a ferroelectric random access memory research system with many advantages such as polarization stability, safe to apply, easy manufacturing process [10-12]. BaTiO<sub>3</sub> is very easy to control through substrate strain and element doping [13].

Synthesis is considered environmentally friendly, non-toxic, effective, biocompatible, and harmless. Extracts with plants have phytochemical properties that function to reduce or stabilize metal semiconductor materials [14, 15]. *Terminalia catappa* or known as the ketapang fruit tree is widespread in tropical and subtropical areas. This plant is usually used traditionally in treating diseases such as inflammation, weight loss, blood pressure, lowering sugar levels, and many more health benefits [16-18]. The chemical content of the ketapang plant contains phenolics, tannins, and

flavonoids [19]. Ketapang leaves are antibacterial agents that have the potential to inhibit bacterial activity [20].

Fourier transform infrared (FTIR) is an analysis technique using infrared spectroscopy. In infrared spectroscopy, infrared radiation is passed through the sample, some of the radiation will be absorbed and some will be transmitted or even passed. Functional group analysis using FTIR aims to determine the physical and chemical processes that occur during the synthesis process. FTIR spectroscopy is an analysis that will not damage the sample and only requires simple sample preparation. FTIR spectroscopy has the advantage of fast and simple sample preparation, allowing direct analysis without separation procedures. This study aims to synthesize ferroelectric materials  $\text{BaTiO}_3$  using plant extracts from ketapang leaves which are used as stabilizing agents and characterized using FTIR.

## 2. RESEARCH METHODS

### 2.1. Materials

Ketapang leaves were collected from the campus area of Universitas Riau, Barium titanate ( $\text{BaTiO}_3$ ) and aqua DM were used in the synthesis.

### 2.2. Preparation of Ketapang leaf extract

Ketapang leaves were washed thoroughly with water. Then, the leaves were dried in the sun until completely dry to remove residual water. The dried leaves were finely ground into powder. A total of 5 grams of dried leaves and fine powder were mixed with a certain amount of deionized water in a beaker. The mixture was heated at a temperature of 100 degrees Celsius for three hours with constant stirring at a speed of 450 rpm, producing a red solution and a yellow solution. After that, the solution obtained was filtered to obtain an extract which was put into the refrigerator for the next 24 hours.

### 2.3. Synthesis of $\text{BaTiO}_3$ Solution via Sol-Gel Method

The relative molecular mass of  $\text{BaCO}_3$  is calculated then enter the mass value of  $\text{BaCO}_3$  with the composition (X)  $\text{BaTiO}_3$ -(1-X)  $\text{BaZr}_{0.5}\text{Ti}_{0.5}\text{O}_3$ . Weigh all ingredients using a digital scale to ensure the accuracy of the composition. Dissolve  $\text{TiO}_2$  with a mixture of ethylene glycol (5 ml) and alcohol (5 ml). Stir the solution for at least 25 hours or until the  $\text{TiO}_2$  powder is completely dissolved. Mix  $\text{BaCO}_3$  with the  $\text{TiO}_2$  solution that has been made. Add 3 drops of Acetyl Acetone to the mixture. Stir the mixture for 2 hours to ensure homogenization.

### 2.4. Characterization FTIR

FTIR is a sophisticated method used to identify and determine the chemical composition of a material. Its working principle focuses on the detection of molecular vibrations triggered by exposure to infrared light. In infrared spectroscopy, infrared radiation is passed through the sample. Some of the radiation will be absorbed by the sample and some will be passed or transmitted by the sample. Functional groups that absorb FTIR radiation at wave numbers and chemical vibration bonds are displayed in the fingerprint spectra because the FTIR spectral pattern, especially the fingerprint region, is a complex pattern whose interpretation requires the help of chemometrics.

## 3. RESULTS AND DISCUSSIONS

Based on the test results, it can be seen that the ketapang leaf extract has a wave peak produced from the FTIR analysis which is one of the characterization techniques needed to analyze the molecular structure and functional groups of various materials from the samples made. Figure 1 shows the results of the FTIR analysis of the  $\text{BaTiO}_3$  nanoparticle sample synthesized with ketapang leaf extract. The FTIR spectrum provides information about the molecular structure and functional groups contained in the sample.

The FTIR spectrum of  $\text{BaTiO}_3$  synthesized with ketapang leaf extract shows several characteristic peaks in the mid-infrared region ( $4000 - 400 \text{ cm}^{-1}$ ). These peaks can be determined by the specific vibration modes of the  $\text{BaTiO}_3$  structure and organic compounds contained in the ketapang

leaf extract. The peak of wave number  $600\text{ cm}^{-1}$  indicates the bending of Ti–O–Ti in the  $\text{BaTiO}_3$  structure, while the peak of wave number  $1047\text{ cm}^{-1}$  shows the stretching of the Ti–O structure in the  $\text{BaTiO}_3$  structure. The peaks of wave number  $1400\text{ cm}^{-1}$  and  $1634\text{ cm}^{-1}$  indicate the stretching of C–O and C=O in carboxylic acid compounds. The wave number peak of  $2928\text{ cm}^{-1}$  indicates the stretching of CH in the methylene group, then the wave number peak of  $3425\text{ cm}^{-1}$  indicates the stretching of OH in the alcohol compound. The wave number peaks in the areas of  $3425\text{ cm}^{-1}$ ,  $2928\text{ cm}^{-1}$ ,  $1634\text{ cm}^{-1}$ , and  $1400\text{ cm}^{-1}$  indicate the incorporation of organic compounds from ketapang leaf extract into the  $\text{BaTiO}_3$  structure. These compounds can change the surface structure and dopant of  $\text{BaTiO}_3$ , so that it will affect the properties of  $\text{BaTiO}_3$ .

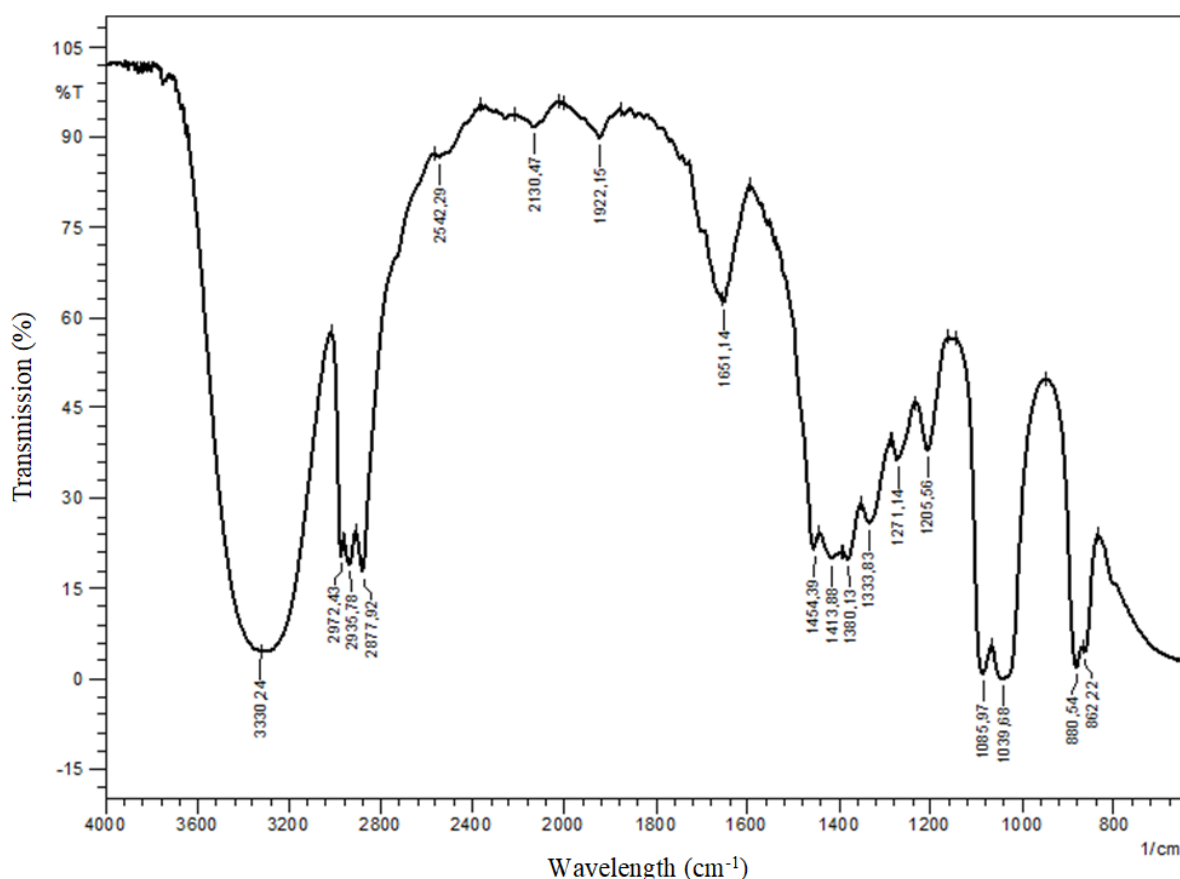


Figure 1. FTIR results of ketapang leaf extract with  $\text{BaTiO}_3$

#### 4. CONCLUSION

$\text{BaTiO}_3$  has a cubic perovskite structure with a wave number peak of  $600\text{ cm}^{-1}$  indicating the bending of Ti–O–Ti and a wave number peak of  $1047\text{ cm}^{-1}$  indicating the stretching of the Ti–O structure. Ketapang leaf extract is incorporated into the  $\text{BaTiO}_3$  structure, as indicated by the wave number peaks of  $3425\text{ cm}^{-1}$ ,  $2928\text{ cm}^{-1}$ ,  $1634\text{ cm}^{-1}$ , and  $1400\text{ cm}^{-1}$ .  $\text{BaTiO}_3$  has Ti–O functional groups, as indicated by the wave number peaks of  $600\text{ cm}^{-1}$  and  $1047\text{ cm}^{-1}$ . Ketapang leaf extract has C–O, C=O, C–H, and O–H functional groups, as indicated by the wave number peaks of  $1400\text{ cm}^{-1}$ ,  $1634\text{ cm}^{-1}$ ,  $2928\text{ cm}^{-1}$ , and  $3425\text{ cm}^{-1}$ .

#### REFERENCES

- [1] J. L. Lin, *et al.*, "Improvement of ferroelectric and dielectric properties in  $\text{BaTiO}_3/\text{LaNiO}_3$  superlattices by regulating the ferroelectric layer thickness," *Materials Today Communications*, vol. 39, 108911, Jun 2024.
- [2] Y. Hamzah, *et al.*, "Analisa sifat nutrisi tanah perkebunan yang diberi pupuk urea ( $\text{CO}(\text{NH}_2)_2$ ) menggunakan sensor nutrisi tanah," *Indonesian Physics Communication*, vol. 12, pp. 707-713, 2015.

- [3] Y. Sun, *et al.*, "Enhancement of ferroelectricity in chemical-solution-deposited ZrO<sub>2</sub> thin films through fine phase transition control," *Ceramics International*, vol. 50, pp. 27371-27379, Aug 2024.
- [4] D. P. Oktavia, *et al.*, "Karakterisasi dan simulasi dioda PN mempergunakan alat uji otomatis berbasis mikrokontroler Atmega8a," *Indonesian Physics Communication*, vol. 13, pp. 781-786, 2016.
- [5] A. I. Khan, *et al.*, "The future of ferroelectric field-effect transistor technology," *Nature Electronics*, vol. 3, pp. 588-597, Oct 2020.
- [6] Q. Y. Rong and W. Z. Xiao, "Magnetism, ferroelectricity, and piezoelectricity in bulk  $\alpha$ -CrOOH and its monolayer," *Materials Today Communications*, vol. 40, 109475, 2024.
- [7] M. W. Siregar and Y. Yanuar, "Potensi daun ketapang (*Terminalia catappa*) sebagai bioreduktor untuk sintesis nanopartikel perak dalam penyerapan metilen biru," *Indonesian Physics Communication*, vol. 18, pp. 191-196, Nov 2021.
- [8] X. Liu, *et al.*, "A BaTiO<sub>3</sub>-based flexible ferroelectric capacitor for non-volatile memories," *Journal of Materiomics*, 2024.
- [9] Y. Hamzah and A. Ariswan, "Studi termodinamika penumbuhan lapisan tipis Ga<sub>2</sub>Te<sub>3</sub>," *Indonesian Physics Communication*, vol. 19, pp. 128-135, Nov 2022.
- [10] Y. Zhao, *et al.*, "Effect of acceptor-substitute site on the ferroelectric properties of BaTiO<sub>3</sub> ceramics for multi-state memory," *Materials Research Bulletin*, vol. 176, 112819, 2024.
- [11] T. Ahmed, *et al.*, "Effective A-site modulation and crystal phase evolution for high ferro/piezoelectric performance in ABO<sub>3</sub> compounds: Yttrium-doped BiFeO<sub>3</sub>-BaTiO<sub>3</sub>," *Journal of Alloys and Compounds*, vol. 933, 167709, Feb 2023.
- [12] R. Parningotan and Y. Hamzah, "Sintesis dan karakterisasi NPP perak (Ag-NPs) menggunakan ekstrak kulit buah naga sebagai bioreduktor," *Indonesian Physics Communication*, vol. 17, pp. 139-143, Nov2020.
- [13] K. Marunouchi, *et al.*, "High-concentration doping effects of aliovalent Al and Ga on ferroelectric properties of BaTiO<sub>3</sub> Films," *Thin Solid Films*, vol. 796, 140339, 2024.
- [14] L. Ray, *et al.*, "*Terminalia catappa* leaf extract mediated eco-friendly synthesis of cerium oxide nanoparticles," *Materials Today: Proceedings*, 2023.
- [15] M. B. Satriawan and I. Illing, "Uji FTIR bioplastik dari limbah ampas sagu dengan penambahan variasi konsentrasi gelatin," *Dinamika*, vol. 8, pp. 1-13, 2018.
- [16] O. S. Oladeji and T. Xaba, "Green sythesis of aluminium oxide nanoparticles using *Chrysophyllum albidum*, *Terminalia catappa* and *Mimusops coriacea* leaf extracts for antibacterial and antifungal activities," *Nano-Structures & Nano-Objects*, vol. 37, 101094, 2024.
- [17] M. Silalahi, "Ketapang (*Terminalia catappa* L.): Potential utilization as foodstuffs and traditional medicine," *OARJ Access Research Journals*, vol. 3, pp. 35-41, Apr 2022.
- [18] M. S. N. Nainggolan, *et al.*, "Penentuan sifat magnetik pasir dan debu sepanjang jalan Kartama Kota Pekanbaru Menggunakan Magnetic Probe Pasco PS-2162," *Komunikasi Fisika Indonesia*, vol. 16, pp. 12-19, 2019.
- [19] S. D. Mantaring, *et al.*, "*Terminalia catappa* L. leaf extract interferes with biofilm formation of *Vibrio parahaemolyticus* and enhances immune response of *Penaeus vannamei* against acute hepatopancreatic necrosis disease (AHPND)," *Aquaculture*, vol. 579, 740266, 2024.
- [20] K. Madhavan, *et al.*, "Controlling vegetative cells and spores growth of *Bacillus spp.* using ethanolic Ketapang (*Terminalia catappa* L.) leaf extract," *Heliyon*, vol. 9, 2023.